



ARCHITECTURAL HARDWARE SYSTEMS

STERLING
ENTRY
SYSTEMS

CONTENT

Architectural Hardware

Smoke Baffle / Slim Base Shoe	:	86
Hydraulic Patch	:	87 - 89
Top & Bottom Door Rail	:	90
Patch Fitting	:	91- 93
Glass Door Locks & Handles	:	94 - 101
Sliding Door Systems	:	102 - 116
Washroom Partition	:	117
Door Stoppers	:	118
Commercial Channels	:	119

Glazing & Canopy	:	120 - 127
------------------	---	-----------

Pool Fencing	:	129 - 132
--------------	---	-----------

Tools & Accessories	:	133 - 135
---------------------	---	-----------

26100 Self-Closing Bottom Patch








EN1154 TESTED

Power Adjustable Hydraulic Bottom Patch


Requires no digging or cutting of floor, quick and easy installation with just four fasteners.

- Suitable door weight : Max 100kg. (220 Lbs)
- Suitable door width : 750-1000mm (29-17/32" - 39-3/8")
- Suitable door thickness : 8-13mm (5/16" - 1/2")
- Ambient temperature : -20°C to +50°C

Hold open 90° (Non Hold Open also available)
 Easy installation with base seat adjustable: ±3mm backward and forward, ±3mm left and right and ±4° alignment adjustment
 Compliance With EN 1154 Tested and UL Certified
 Available with SS 304/316 Cover

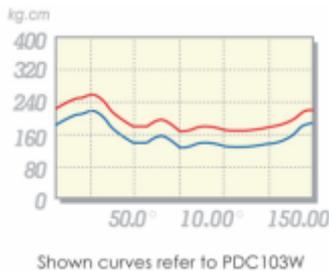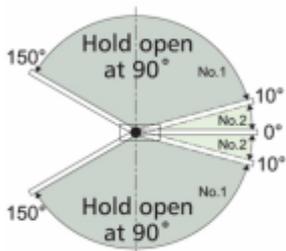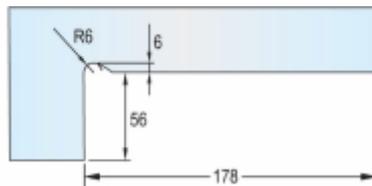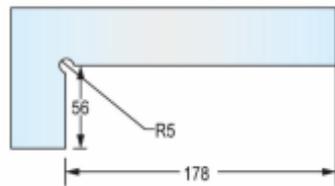
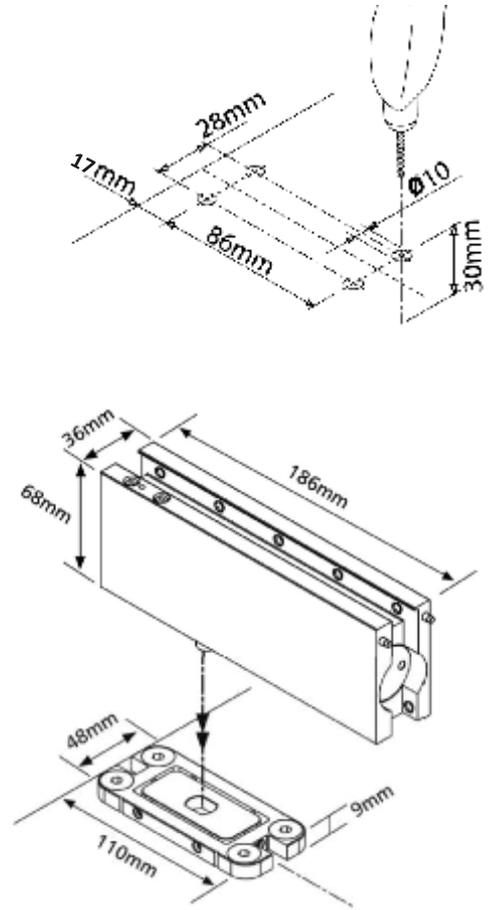


Available Finishes

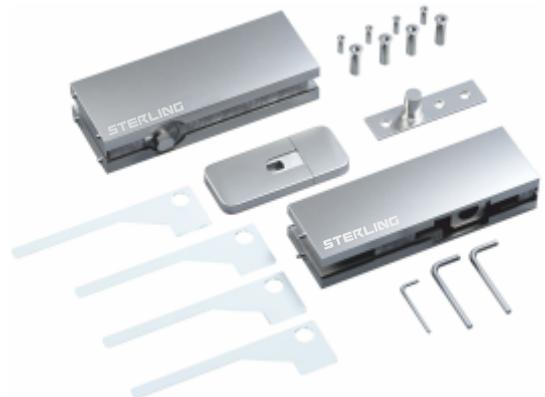

Kit includes : Bottom Patch + Top Patch + Pivot

26105 Self-Closing Bottom Patch

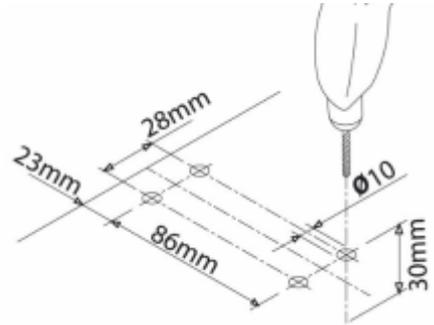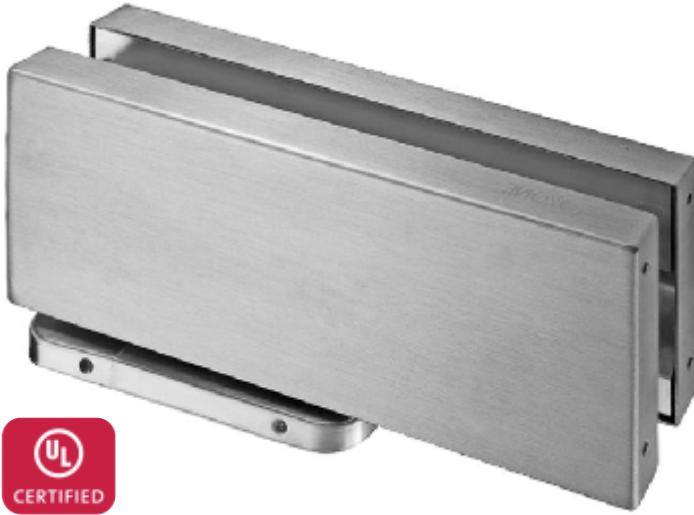


EN1154 TESTED

Power Adjustable Hydraulic Bottom Patch





Requires no digging or cutting of floor, quick and easy installation with just four fasteners

- Suitable door weight : Max 100kg. (220 Lbs)
- Suitable door width : 750-1000mm (29-17/32" - 39-7/32")
- Suitable door thickness : 10-13mm (25/64" - 1/2")
- Ambient temperature : -20°C to +50°C

Hold open 90° (Non Hold Open also available)
 Easy installation with base seat adjustable: ±3mm backward and forward, ±3mm left and right and ±4° alignment adjustment
 Available with SS 304/316 Cover

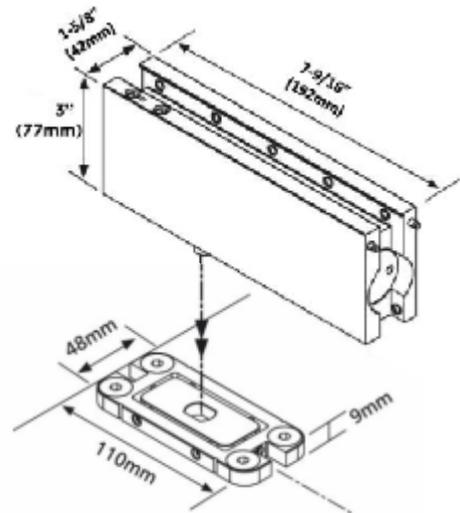

STERLING ENTRY SYSTEMS

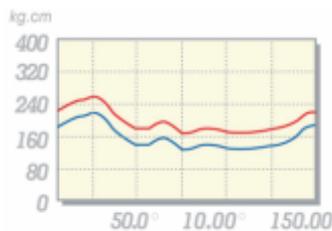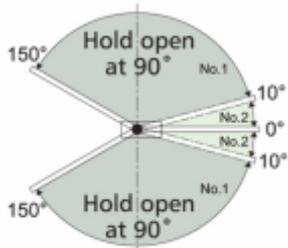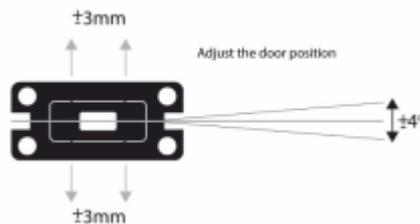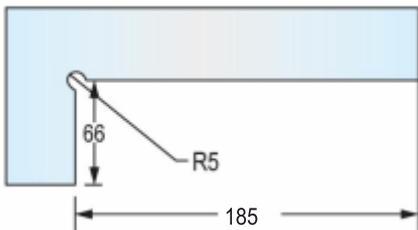

Shown curves refer to PDC103W

Available Finishes




CH BN MB MG SA

*Kit includes same size top patch



26135 Self Closing Bottom Patch

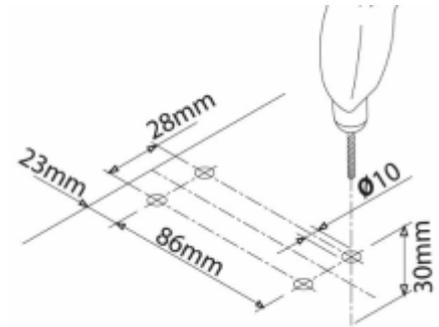






EN1154 TESTED

Power Adjustable Hydraulic Bottom Patch

Requires no digging or cutting of floor, quick and easy installation with just four fasteners

- Suitable door weight : Max 100kg. (220 Lbs)
- Suitable door width : 750~1250mm (29 17/32"~49 7/32")
- Suitable door thickness : 10~15mm (25/64"~19/32")
- Maximum opening : 150°
- Controlled : 135°
- Ambient temperature : -20°C to +50°C

Hold open 90° (Non Hold Open also available)
 Easy installation with base seat adjustable: ±3mm backward and forward, ±3mm left and right and ±4° alignment adjustment
 Available with SS 304/316 Cover

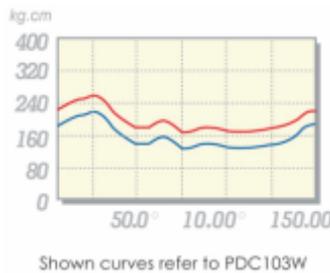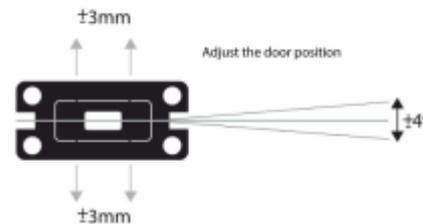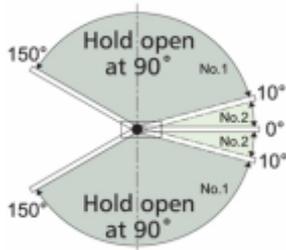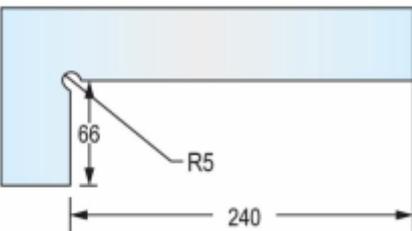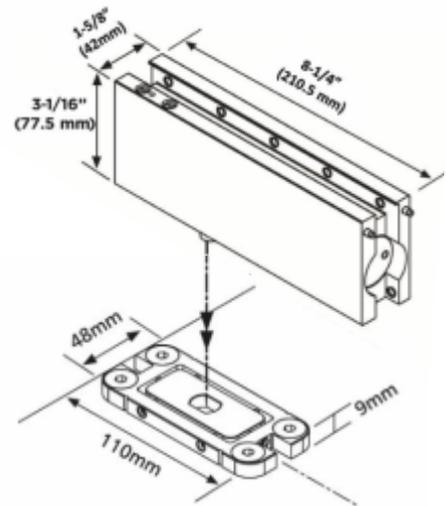

Available Finishes




*Kit includes same size top patch

STERLING ENTRY SYSTEMS




26600

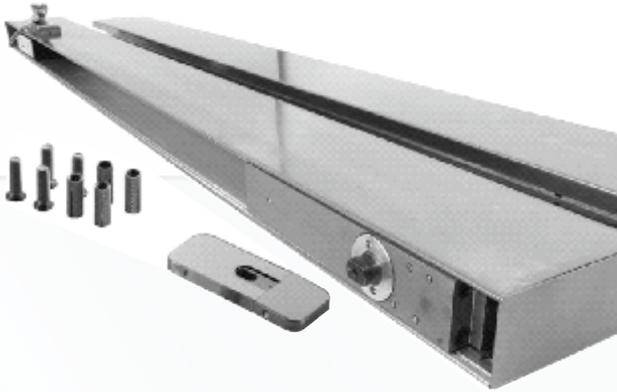

With variable pivot point of 55 or 65mm (2-11/64" or 2-19/32")

Door rail system with inbuilt lock & hydraulic patch system for North American market

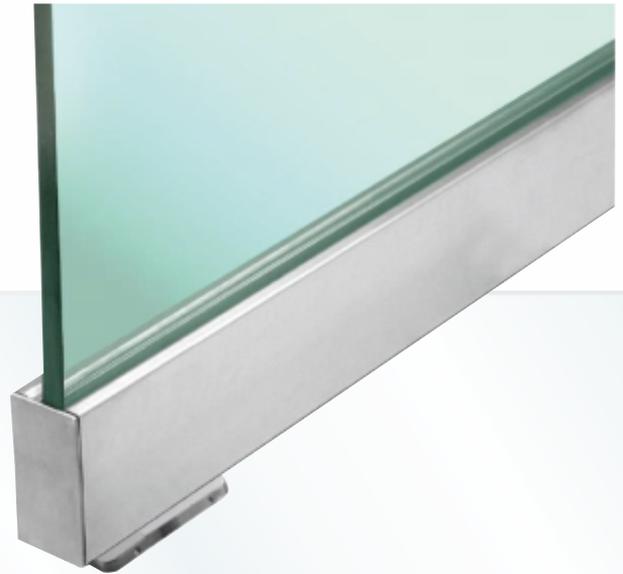

- The door held by friction grip (Dry Glazing)
- No need of glass preparation
- Glass Size: Suitable for 12mm~15mm (15/32"~19/32")
- Comes with American type lock option as well
- Supplied in sets for Top & Bottom
- Cover Grade SS-304 with End Caps
- Bolts from opposite sides make unauthorized removal virtually impossible




Glass door rails offer ease of installation with dependable quality. These pre-assembled mechanical rails have a variety of fabrication options to create a customized solution that fits any glass door application.

Available Finishes




BN MB SA


26201-A OVER PANEL SIDE PANEL CONNECTING PATCH WITH PIVOT

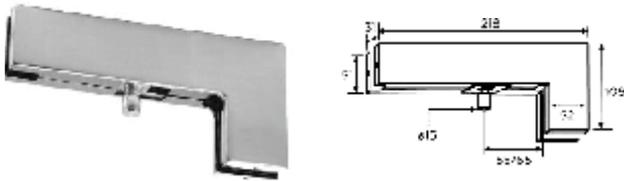


26201-B OVER PANEL SIDE PANEL CONNECTING PATCH WITH STRIKE INSERT

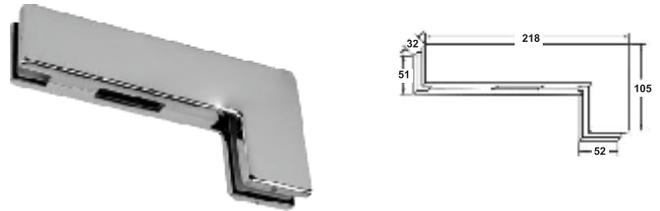


26201-C OVER PANEL SIDE PANEL CONNECTING PATCH WITH STRIKE INSERT

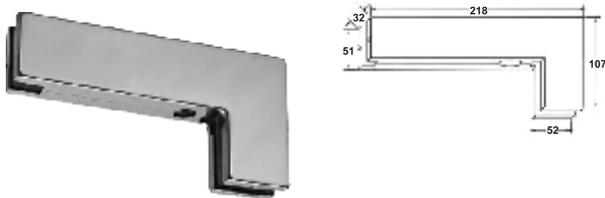

26201-D OVER PANEL DOUBLE DOOR STRIKE

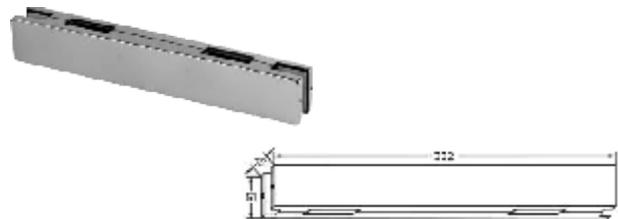


26201-DR OVER PANEL DOUBLE DOOR STRIKE

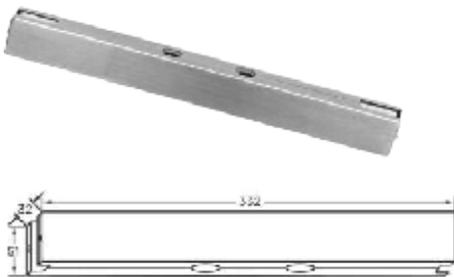



26201-E OVER PANEL DOUBLE DOOR STRIKE




Pivot TOP PIVOT FOR PATCH/POINT FITTING DOORS

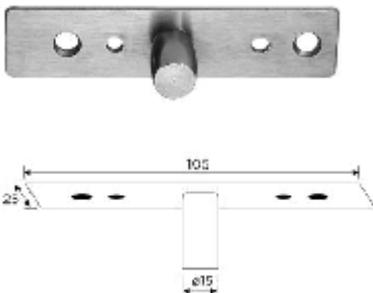


Available Finishes

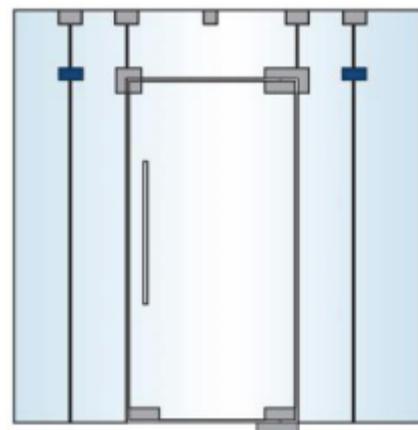


26230-WF DOUBLE GLASS CONNECTOR WITH FIN FITTING INSIDE

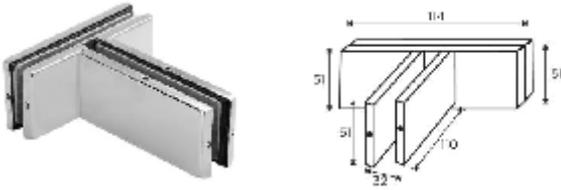

26240 WALL TO GLASS CLAMPING PATCH

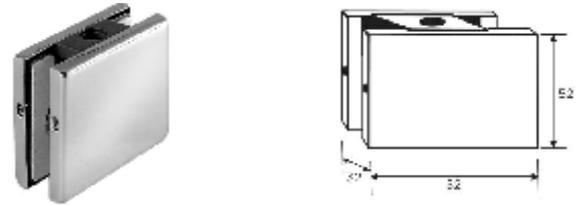


26250 GLASS TO GLASS CONNECTING PATCH TO WALL/CEILING

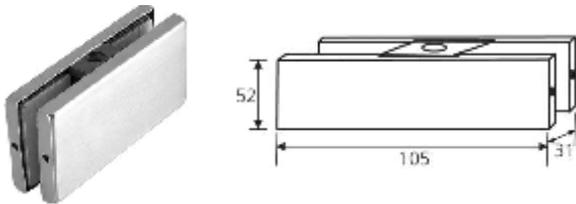


26260 DOUBLE GLASS CONNECTOR



26241-WF-L/R OVER PANEL SIDE PANEL CONNECTOR WITH FIN FITTING (RIGHT/LEFT)

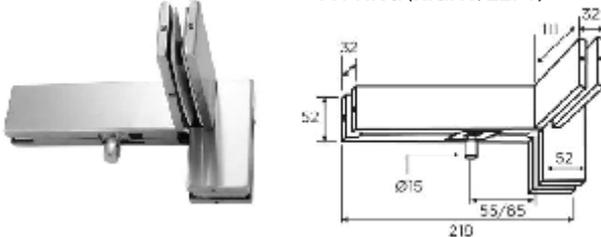

26201-T OVER PANEL CONNECTOR FOR BACK TO BACK DOORS

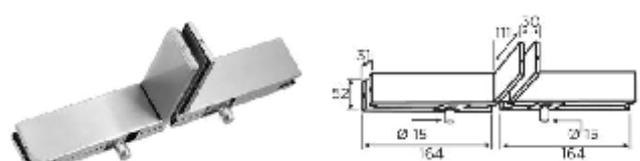

26600 APF4000
DOOR RAIL



26600 APF5000
SIDE PANEL RAIL



26600 APF5000-1
SIDE PANEL UPPER RAIL




26600 APF5000-2
SIDE PANEL LOWER RAIL



26600 APF3000
DOOR RAIL WITH LOCK




26600 APF6000
SIDE PANEL RAIL

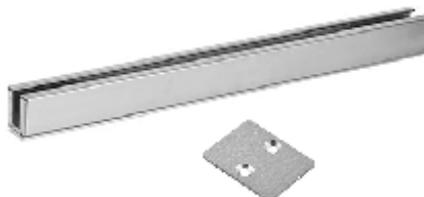

26606
MINI BASE SHOE- 10ft
(with 10 clamps & cladding)



Available Finishes




26202

TOP PATCH VARIABLE PIVOT POINT OF 55 TO 65MM AVAILABLE WITH SS 304/316 COVERS




26203

BOTTOM PATCH

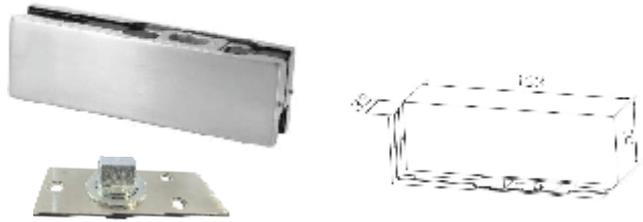

26204

WALL MOUNTED OVER PANEL PATCH WITH PIVOT

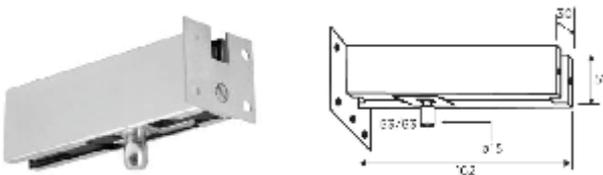

26210

OVER PANEL SIDE PANEL CONNECTOR



26210-DST


OVER PANEL SIDE PANEL CONNECTOR WITH STOPPER



26211

CORNER PATCH LOCK WITH STRIKE PLATE (AMERICAN CYLINDER)


One Side Key, One Side Knob

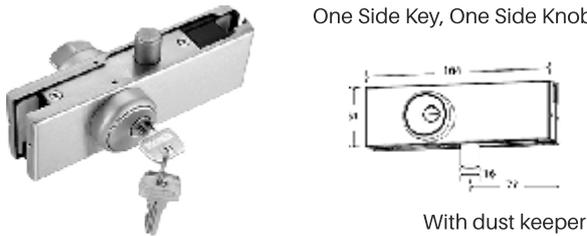

With dust keeper



26220

QUADRUPLE CONNECTOR

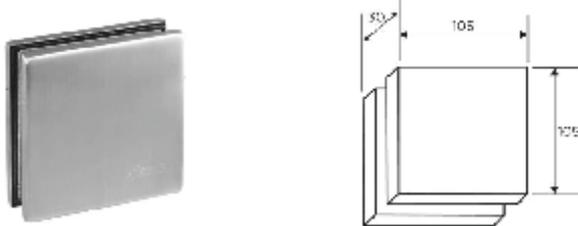

26220-WF

QUADRUPLE CONNECTOR WITH FIN

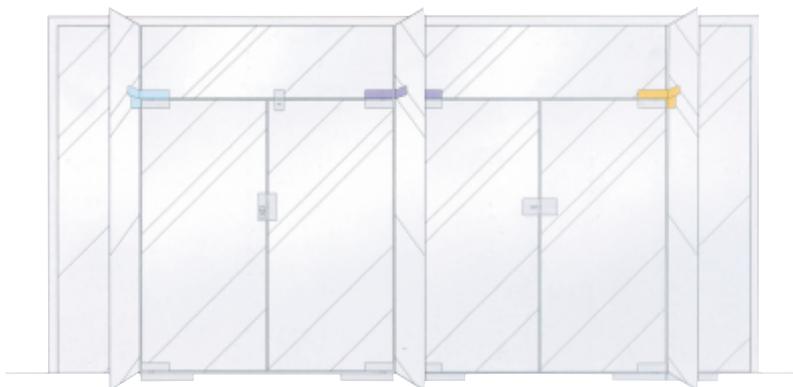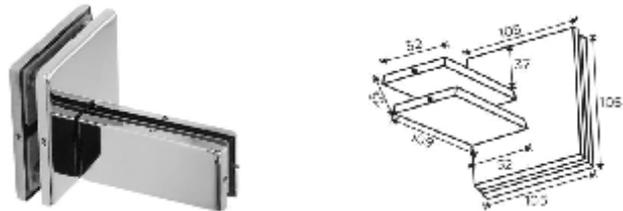

Available Finishes



BN MB



ARCHITECTURAL HARDWARE SYSTEMS

**LOCKS
&
HANDLES**

70001/70002



70001LH-BN/MB - Left Hand Brushed Nickel/Matt Black



70002RH-BN/MB - Right Hand Brushed Nickel/Matt Black

Glass Door Lock Is For Swing Door: Suitable For Public And Commercial Buildings. With ANSI Grade 1 Lockcase And Lever Handle, Different Lockcase Function Available To Suit For Different Project Requirement. Suitable For Glass To Glass & Glass To Wall Installation With Stainless Steel Door Handle And Lockcase Cover, Suitable For Most Commercial Project Requirement.



70009

Electric Magnetic Door Lock with Remote Control Access System



70010
Electric Strike



70003/70004

70003 BN/MB - Keeper Brushed Nickel/Matt Black
70004 American Cylinder Assembly ANSI

Available Finishes



- ENTRANCE
- OFFICE
- STORE ROOM
- CLASSROOM
- PASSAGE

71001R-LHBN

STANDARD DUTY
MECHANICAL LOCK
GLASS TO GLASS/WALL



71001SDL-BN

STANDARD DUTY
MECHANICAL LOCK
GLASS TO GLASS/WALL



71001R-LHMB

STANDARD DUTY
MECHANICAL LOCK
GLASS TO GLASS/WALL



71001SDL-MB

STANDARD DUTY
MECHANICAL LOCK
GLASS TO GLASS/WALL



71101-LHBN/MB
71101-RHBN/MB

STANDARD DUTY
MECHANICAL LOCK
GLASS TO GLASS/WALL
FULL SWING BOTH SIDE



71101HSL-BN/MB

STANDARD DUTY
MECHANICAL LOCK
GLASS TO GLASS/WALL
HALF SWING SINGLE SIDE



71103

71103-1



ARCHITECTURE HINGES &
LOCK COMBO

71103-2-BN



71103-2-MB



Available Finishes



BN

MB

71102HSL-BN/MB


STANDARD DUTY
MECHANICAL LOCK
GLASS TO GLASS/WALL



71104 GLASS DOOR LOCK WITH STRIKE BOX



71105 GLASS DOOR LOCK WITH STRIKE PLATE



71106 GLASS DOOR LOCK WITH STRIKE BOX



71107 THUMB TURN LOCK & STRIKE BOX



71108

71109

71110 GLASS DOOR LOCK WITH STRIKE BOX (WITH INDICATOR)



71111 CENTRE PATCH LOCK VERTICAL



71102WIHS-LH

STANDARD DUTY MECHANICAL LOCK GLASS TO GLASS/WALL (WITH INDICATOR & MAGNETIC STRIKE PLATE) SINGLE SIDE OPERATION



Available Finishes



BN MB

71112 GLASS DOOR LOCK WITH STRIKE BOX/PLATE



70000

ELECTRONIC GLASS DOOR LOCK

STERLING KEYLESS GO SECURE DIGITAL LOCK

LOCKS & HANDLES



FINGERPRINT/KEY CODE/CARD ACCESS

NO GLASS FABRICATION REQUIRED

FOR 10-12MM GLASS


BATTERY OPERATED

BATTERY LIFE UP TO ONE YEAR, LOW POWER INDICATOR AND EMERGENCY POWER PORT ACCESS

ANTI THEFT ALARM FUNCTION (AFTER 5 INCORRECT ERRORS ALARM SOUNDS)



Touch ID



Applications:

- Residential Apartment
- Libraries
- Offices Entrance
- High Security Premises



CALL US IN CASE YOU REQUIRE HELP FOR SETUP

LADDER PULL HANDLE WITH LOCK

60084



- **Bold & Elegant look**
- **Suitable for Large Glass Doors**
- **ANSI Locking Mechanism**

Available Finishes



BN

MB





LOCKS & HANDLES

LADDER PULL LOCKABLE HANDLES

60336R/60448R

60336SQ/60448SQ

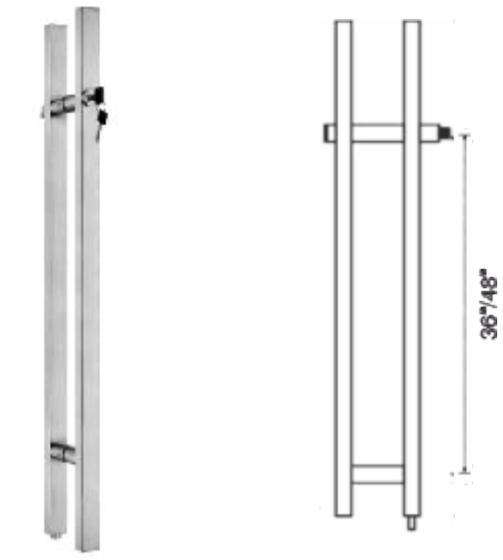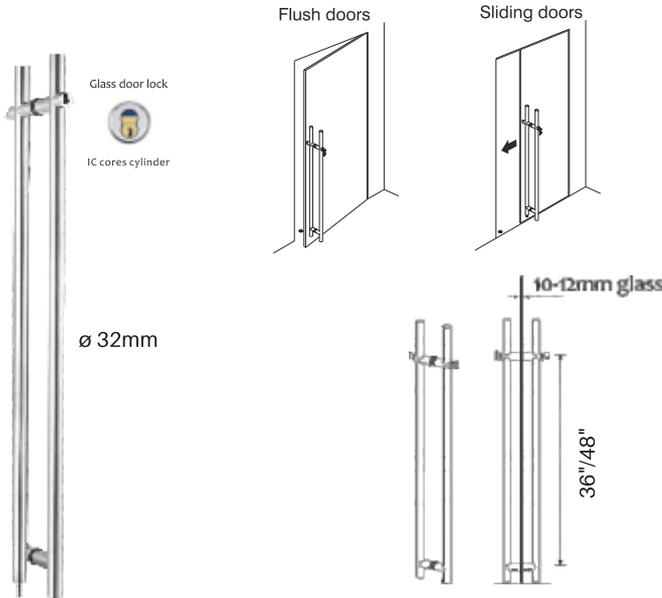

LOCKS & HANDLES


D PROFILE PULL HANDLES

60001-12 }
60001-18 } ø19mm
60001-24 }



LADDER PULL HANDLES SQ PROFILE


60076-12
60076-18
60076-24

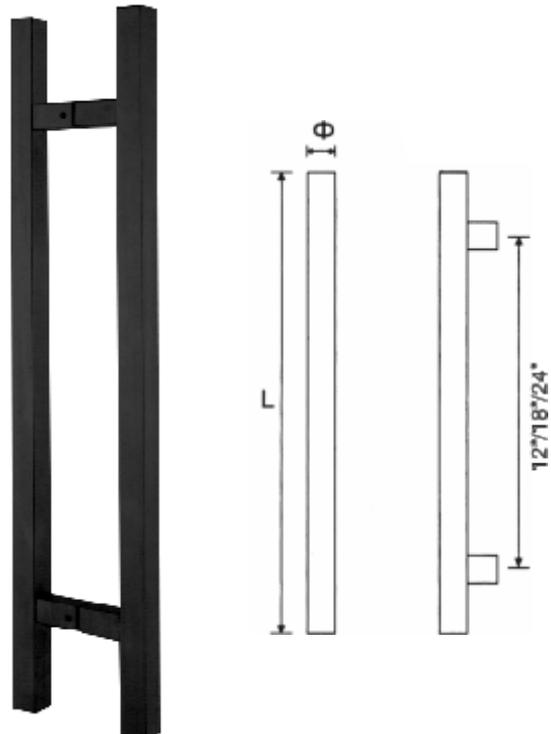


LADDER PULL HANDLES

60006-12 }
60006-18 } ø19mm

60006-24 }
60006-36 } ø32mm
60006-48 }
60006-60 }
60006-72 }

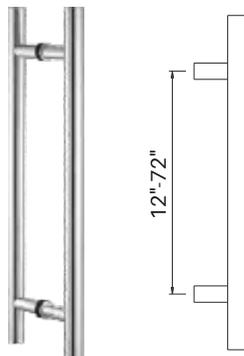

Available Finishes



ARCHITECTURAL SLIM LINE BACK TO BACK HANDLE



60081-12
60081-18
60081-24
60081-36

Chrome Finish



Brushed Nickel Finish




Matt Black Finish



Matt Gold Finish


S PROFILE HANDLE

60005S-18
60005S-24

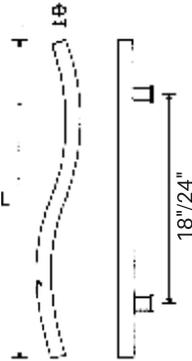



D PROFILE OFFSET HANDLE

60003-18
60003-24

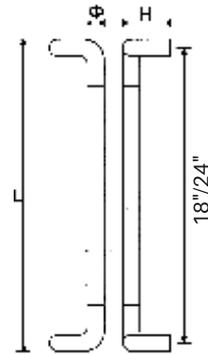


45° OFFSET LADDER PULL HANDLE

64524
64536

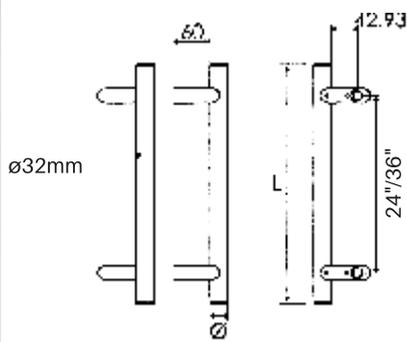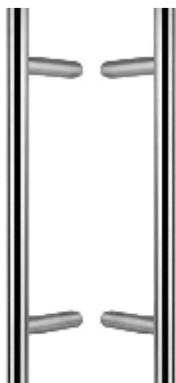


ROYAL WOOD LADDER PULL HANDLE

60003RW-18
60003RW-24



Available Finishes



ALL HANDLES ON PAGE AH13/AH14/AH15 ARE AVAILABLE SINGLE SIDE WITH CAP.
MOST HANDLES ARE AVAILABLE FOR WOODEN DOOR APPLICATION.

69000 SERIES



FEATURES:

- Max. Door Leaf Height: 2500mm
- Max. Door Leaf Width: 900mm
- Max. Door Leaf Load: 70kgs



69004
ROLLER FOR GLASS DOOR



69005
GLASS TO GLASS HINGE



69006
WALL TO GLASS HINGE



71111WSP
CENTRAL PATCH
VERTICAL



71107WSP
THUMB TURN LOCK





69002
TRACK TO
GLASS HOLDER



69003
SLIDING HANDLE



69001
TOP TRACK

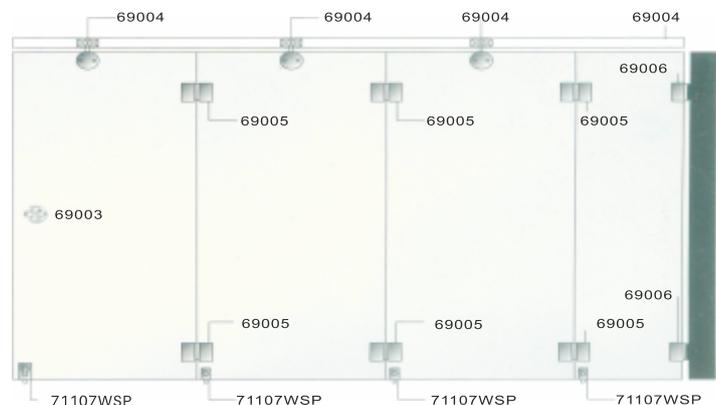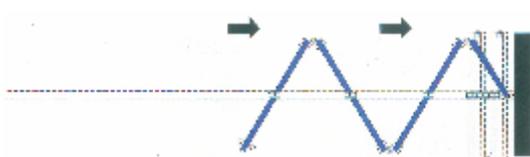

Available Finishes





BN MB


Excellent System Applicable For Diversified Spaces

The relevance degree and practicality of spaces, with the professional design concepts, are brought to the maximum in conformity with different user demands. Not only each piece of spaces finds full use, but the aesthetics, functionality and reliable technology create the effective, economic and multi-shop applicable space. From chain shops, showrooms to shopping malls, hotels and airports, we are sufficient to meet all your requirements.

69006

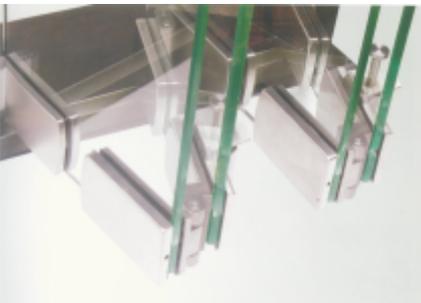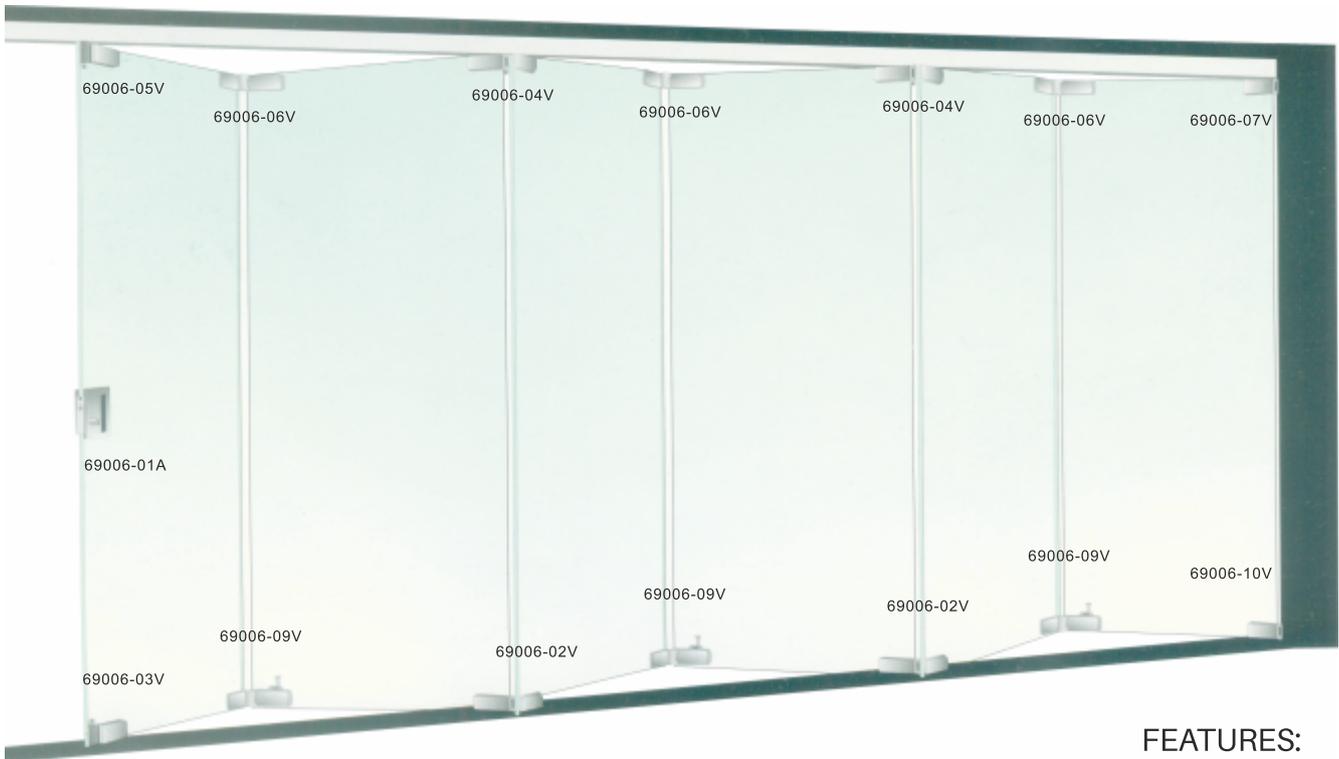

FEATURES:
 Max. Door Leaf Height: 2500mm
 Max. Door Leaf Width: 900mm
 Max. Door Leaf Load: 70kgs

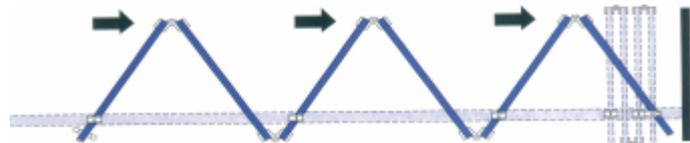

QUALITY

All metal components of the rollers and hinges are stainless steel to hold up to any environment. The rollers ball bearing centres with nylon perimeter to give a lifetime of smooth operation.

The rollers ride in an aluminium track at the top that is anodized bronze. The guide rollers at the bottom of the doors ride in an aluminium track incorporated into the threshold.

PRACTICAL

The system can be locked with a slide bolt or key turn and all components are corrosion resistant and satin silver finish. The hanger wheels are fitted with double sealed precision stainless steel bearings to ensure long life and smooth operation.




SLIDING FOLDING DOOR SYSTEMS


69006 PARTS & ACCESSORIES




69006-01A GLASS TO GLASS DOOR LOCK

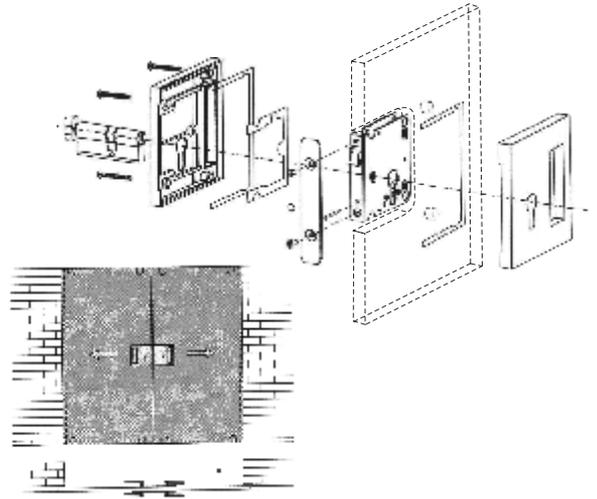


69006-02V GLASS TO GLASS HINGE

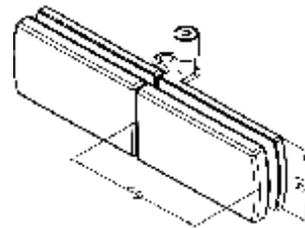


69006-03V BOTTOM GUIDE END PATCH

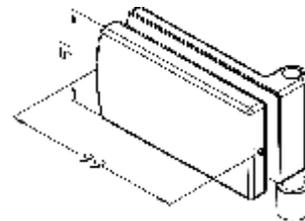

69006-04V GLASS TO GLASS CONNECTOR WITH ROLLER

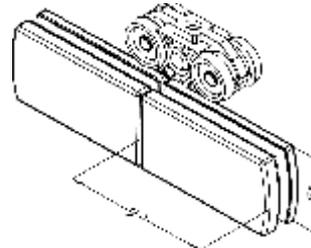


69006-05V END PANEL FITTING WITH ROLLER

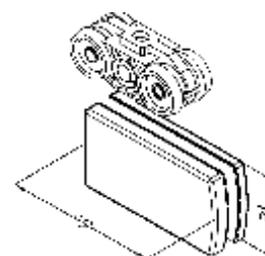




69006-06V

GLASS TO GLASS INTER-CONNECT HINGE

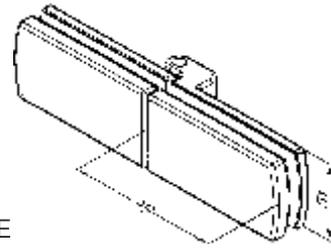


69006-07V

WALL TO GLASS END PANEL HINGE

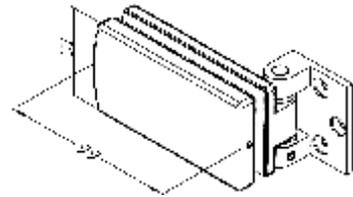


69006-08V

END PANEL FITTING WITH TOP PIVOT

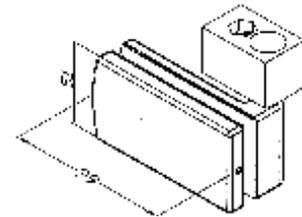



69006-09V

GLASS TO GLASS CONNECTING HINGE WITH FLOOR LOCK

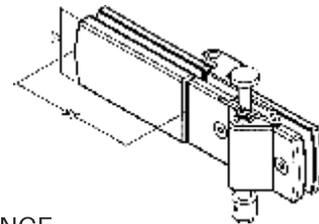


69006-10V

END PANEL FITTING WITH BOTTOM PIVOT

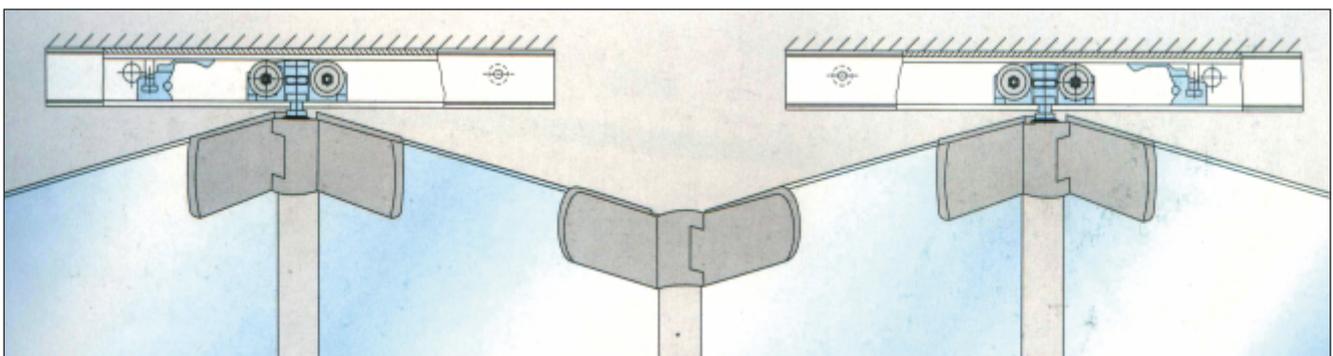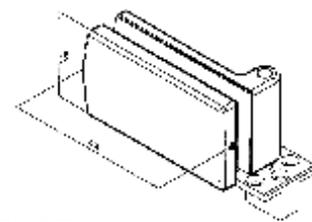


LAGOS STANDARD GLASS/WALL SLIDING DOOR ASSEMBLY


26601 (Kit)

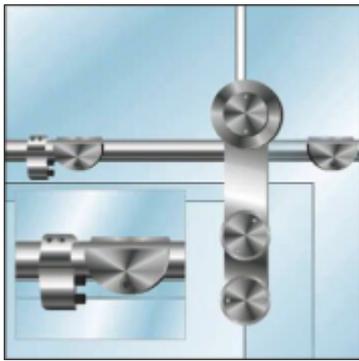


26601-1A (2Pcs)
SLIDING DOOR ROLLER

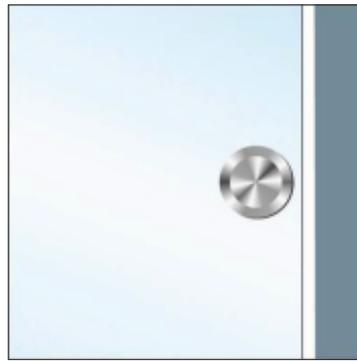


26601-004 (1Pc)
SLIDING HANDLE

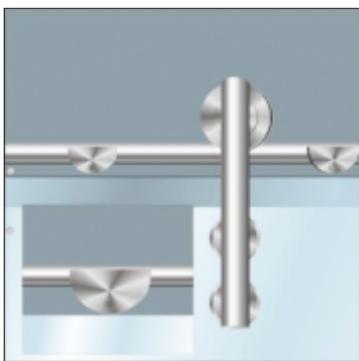


26601-2 (5Pcs)
CLAMP FIXING WALL

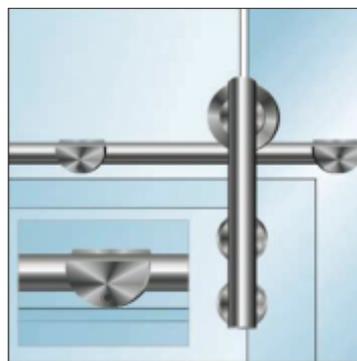


***26601-3**
CLAMP FIXING FOR
TRACK TO CONNECT
WITH GLASS

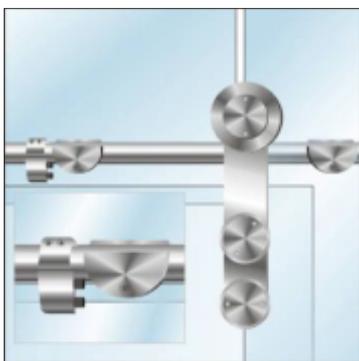


26601-5L (1Pc)
DOOR STOPPER

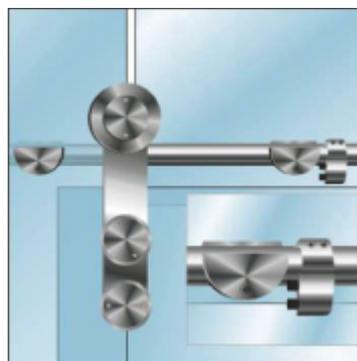


26601-5R (1Pc)
DOOR STOPPER

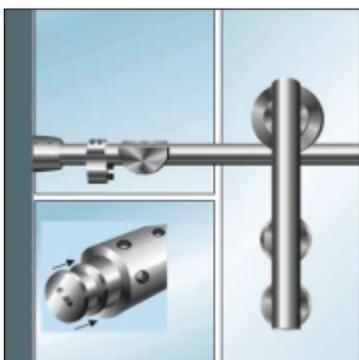

***26601-7F**
PIPE CONNECTOR

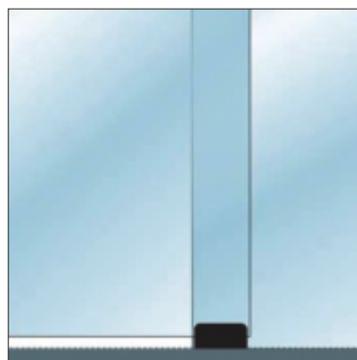


26601-6 (1Pc)
FLOOR GUIDE





Available Finishes



*Does not include in the kit

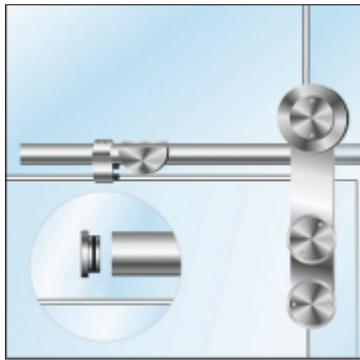


26601-005
(2Pcs)
END CAP

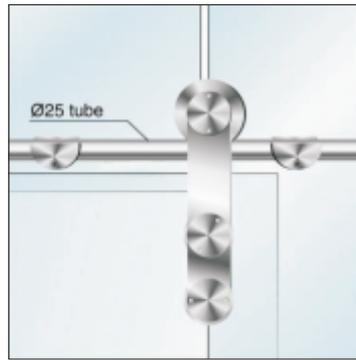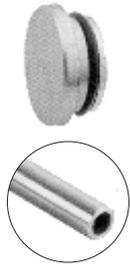

26601-25H
(1Pc)
ROD 103"



Dia (mm)	Thickness (mm)
25	2.0
25	2.5

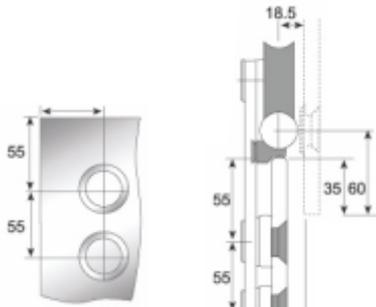

OW = overpanel with
SW = sidelight width
DW = door width




TECHNICAL DATA

Sidelight opening	Entry width	Door width	Tube length
910-1010mm	800-900mm	880-980mm	2038mm
1010-1110mm	900-1000mm	980-1080mm	2238mm
1110-1210mm	1000-1100mm	1080-1180mm	2438mm
1210-1310mm	1100-1200mm	1180-1280mm	2638mm

Note

The distance for clamp fixing for track, wall fixing:

1. Weight 80kgs: max-distance between the clamps= 1/2 the width of the door;
2. Weight 80kgs- 120kgs: max-distance between the clamps= 1/3 the width of the door;
3. Weight 120kgs- 150kgs: max-distance between the clamps= 1/4 the width of the door.

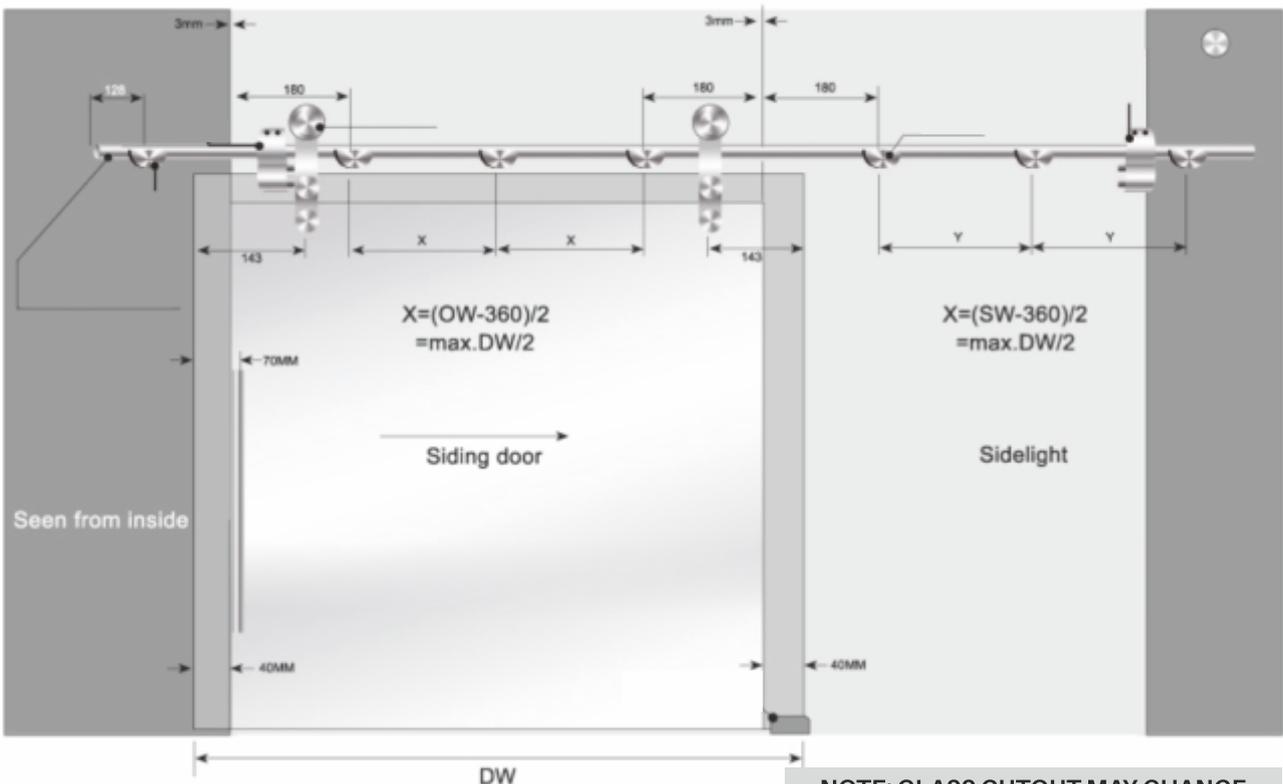


NOTE: GLASS CUTOUT MAY CHANGE

LAGOS BY PASS GLASS/WALL SLIDING DOOR ASSEMBLY


26602





26602-1D
SLIDING DOOR ROLLER

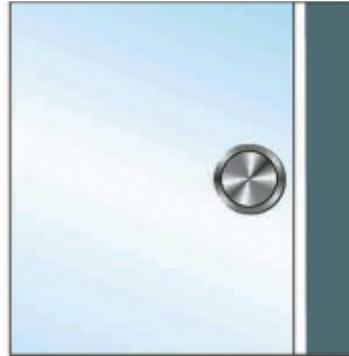


26602-004
SLIDING HANDLE

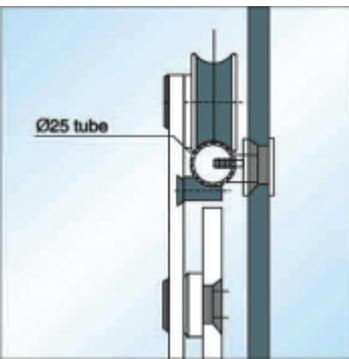

26602-044
CLAMP FIXING FOR WALL

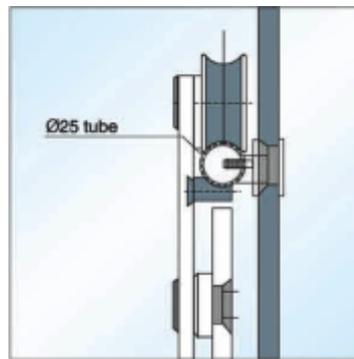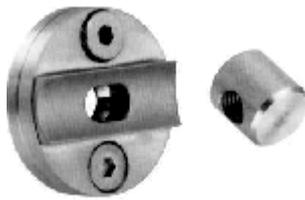



26602-003
CLAMP FIXING FOR TRACK AND GLASS

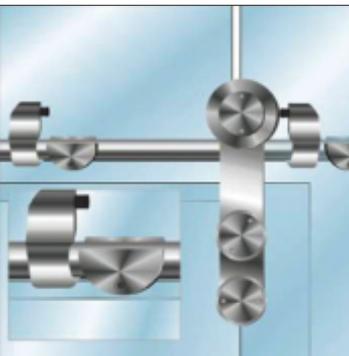


26602-023
DOOR STOPPER




26602-7F
PIPE CONNECTOR

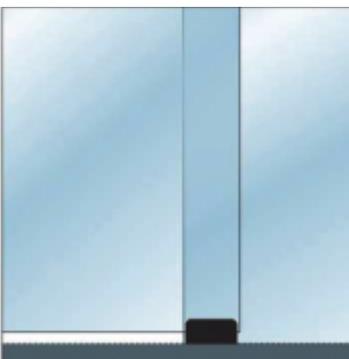

26602-6
FLOOR GUIDE

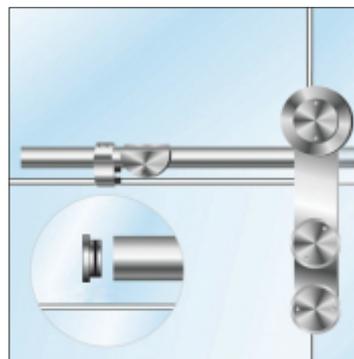

26602-022
END CAP




Available Finishes



CH BN MB MG

For kit items quantity visit our website

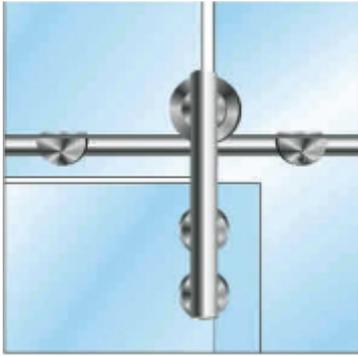


26602-1C
SLIDING DOOR
ROLLER




The glass maximum weight 150kg




26602-004
SLIDING
HANDLE

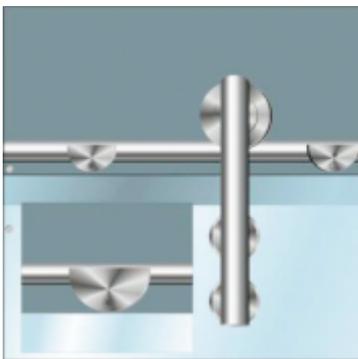


26602-2
CLAMP FIXING
FOR WALL

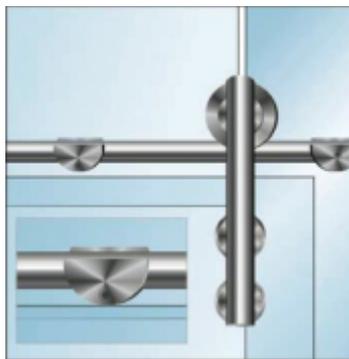


26602-3
CLAMP FIXING
FOR TRACK TO
CONNECT
WITH GLASS

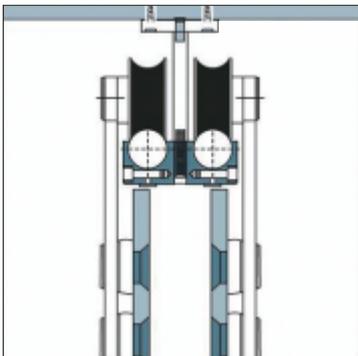

26602-020
DOUBLE TUBE TO
CEILING CLAMP

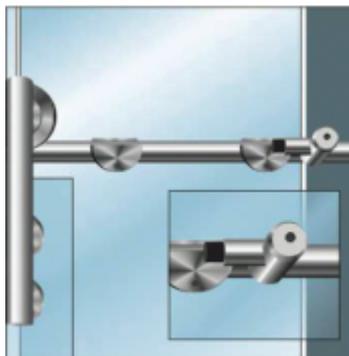


26602-11
DOOR STOPPER

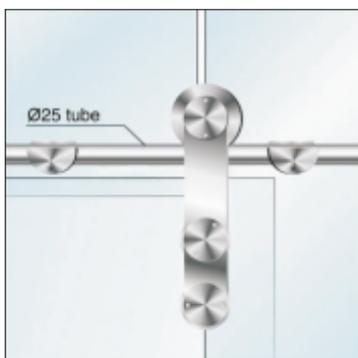

26602-25H
ROD



Dia (mm)	Thickness (mm)
25	2.0
25	2.5

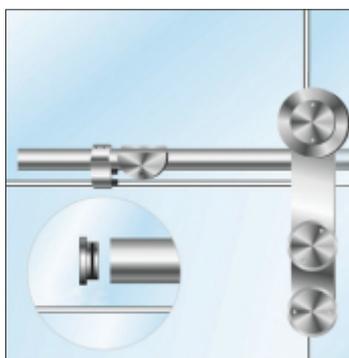

26602-022
END CAP



Available Finishes



CH BN MB MG

For kit items quantity visit our website


26666

LAGOS SLIDING DOOR SYSTEMS



EXCELLENT
CRAFTSMANSHIP

LAGOS PREMIUM GLASS/WALL SLIDING DOOR ASSEMBLY

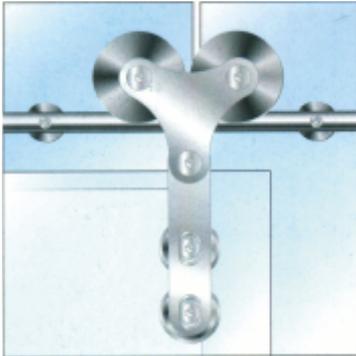


26666-001
SLIDING DOOR
ROLLER



26601-004
SLIDING
HANDLE




26666-011
CLAMP FIXING
FOR WALL

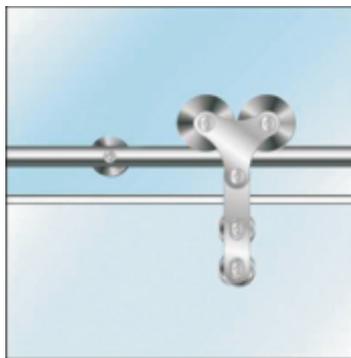


26666-002
CLAMP FIXING
FOR TRACK TO
CONNECT
WITH GLASS




26666-003
PIPE CONNECT

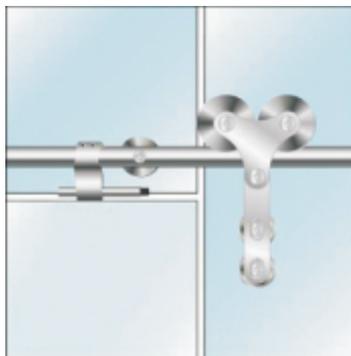

26666-004
DOOR STOPPER

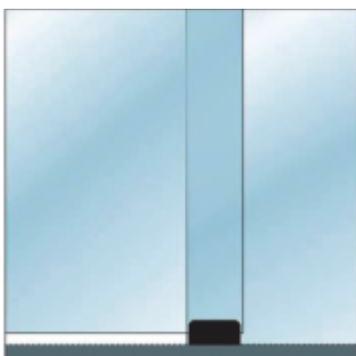

26666-6
FLOOR GUIDE

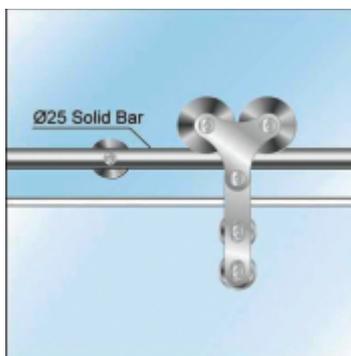

26666-25S
Ø25 SOLID BAR



Available Finishes




CH BN MB MG

For kit items quantity visit our website

ANNECY WALL/CEILING MOUNTED DOOR ASSEMBLY


15026

ELEGANT
SLIDING
SYSTEM

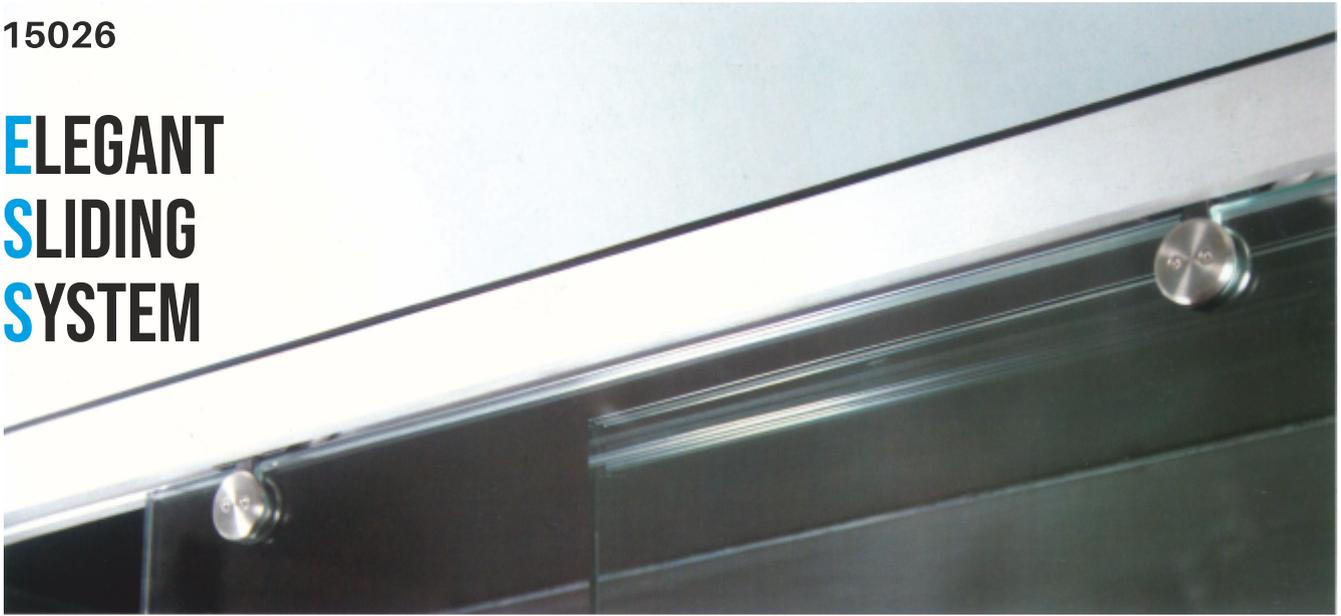


ANNECY SLIDING DOOR SYSTEMS

15026-001 (2 Pcs.)




15026-002 (2 Pcs.)




26601-004 (1 Pc.)
SLIDING HANDLE





15026-003 (2 Pcs.)




26601-006 (1 Pc.)



15026-T (1 Pc.)
OVERHEAD CHANNEL
120"



Glass Thickness : 8-10mm
 Max Glass Width : 1000mm
 Max Glass Door Weight : 80kg
 Glass Fabrication Required : Holes required
 in fixed panel and door

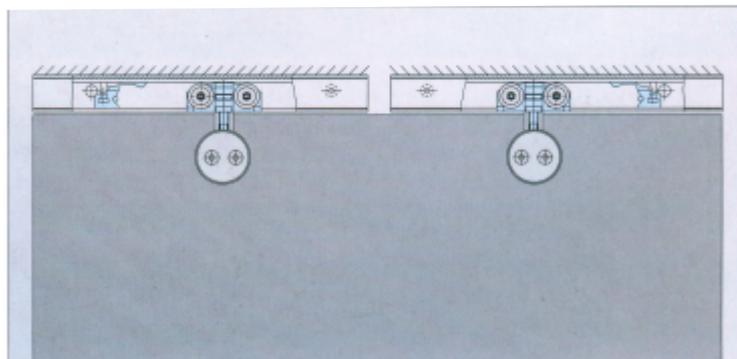


Available Finishes



CH BN MB


WALL/GLASS MOUNTED DOOR ASSEMBLY

15026-GC
GLASS TO TRACK CLAMP

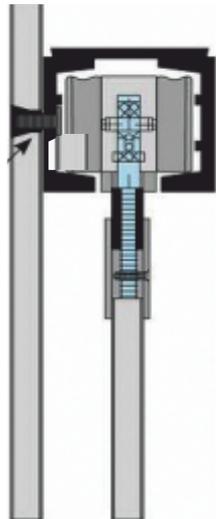


GLASS MOUNTED DOOR ASSEMBLY

15026-LC
WALL TO TRACK CLAMP

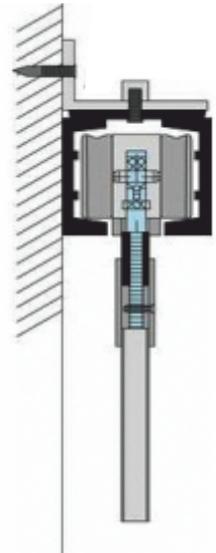


SIDE WALL MOUNTED DOOR ASSEMBLY

15026-11
FIXED CHANNEL






OVERHEAD TRACK WITH
1 MOVABLE PANEL &
1 FIXED PANEL

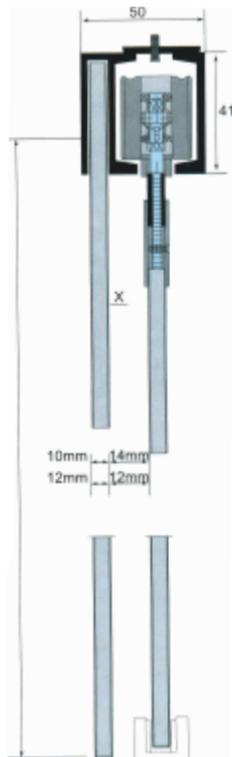

15026-22
PASS LINE



OVERHEAD BYPASS TRACK

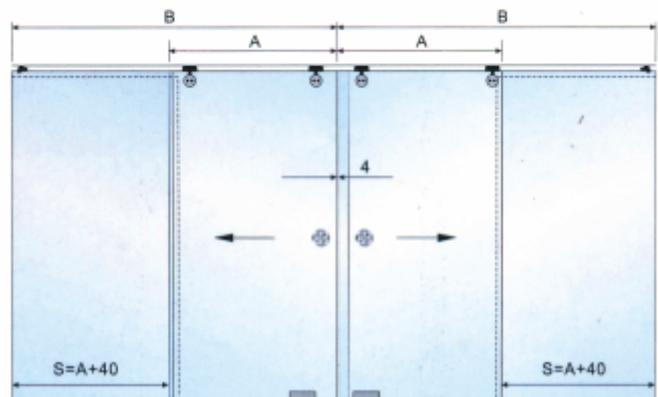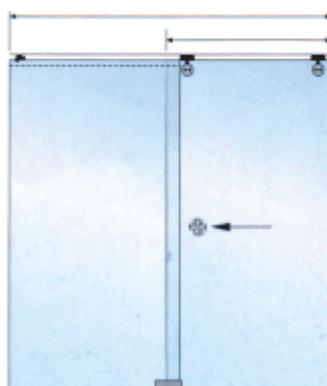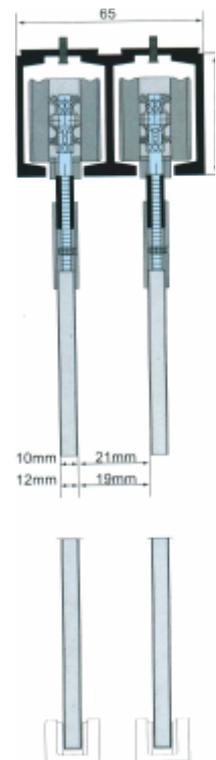

Available Finishes



CH BN MB

PEMBERTON SOFT CLOSE SLIDERS FOR SINGLE DOORS

26066



PEMBERTON SOFT CLOSE


SOFT CLOSE SLIDING SYSTEM

Ceiling Mounted With Fixed Panel




Specifications :

- For 8-12mm Glass Door
- Max Door Weight : 80Kg.
- Max Door Height : 2300mm
- Min Door Width : 750mm
- Track Bar Size : 57x59
- Material : Aluminum

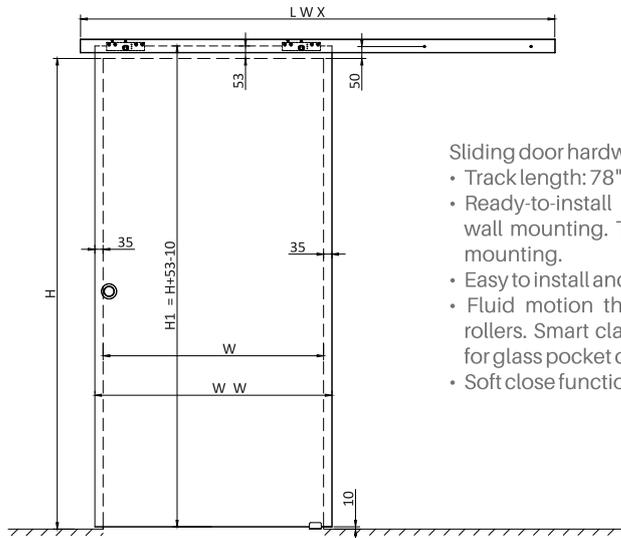


- Sliding door hardware for PEMBERTON Single glass door
- Track length: 78"
 - Ready-to-install kit including sliding track and parts for wall mounting. The track is also pre-drilled for a ceiling mounting.
 - Easy to install and long lasting.
 - Fluid motion through smooth and silent ball bearing rollers. Smart clamp system avoids drilling glass. Perfect for glass pocket door too.
 - Soft close function



U CHANNEL FOR SIDE LIGHT SOLD SEPARATELY

Available Finishes



Parts list

TRACK X1	TRACK COVER X1	CLAMP 2-3Pcs Per 1m	END CAP X2	TOOL X1
CLAMP X2	SOFT CLOSER X2	GUIDE X1	STOPPERS X1	STOPPERS X1

AUSTIN SOFT CLOSE SLIDERS FOR DOUBLE DOORS

26067



SOFT CLOSE
SYNCRO SLIDING SYSTEM


Options for :

- One moving & one fixed panel
- Both moving panels




Specifications-

- For 8-12mm Glass Door
- Max Door Weight : 80Kg.
- Max Door Height : 2300mm
- Min Door Width : 750mm
- Track Bar Size : 57x59
- Material : Aluminum



U CHANNEL FOR SIDE LIGHT
SOLD SEPARATELY

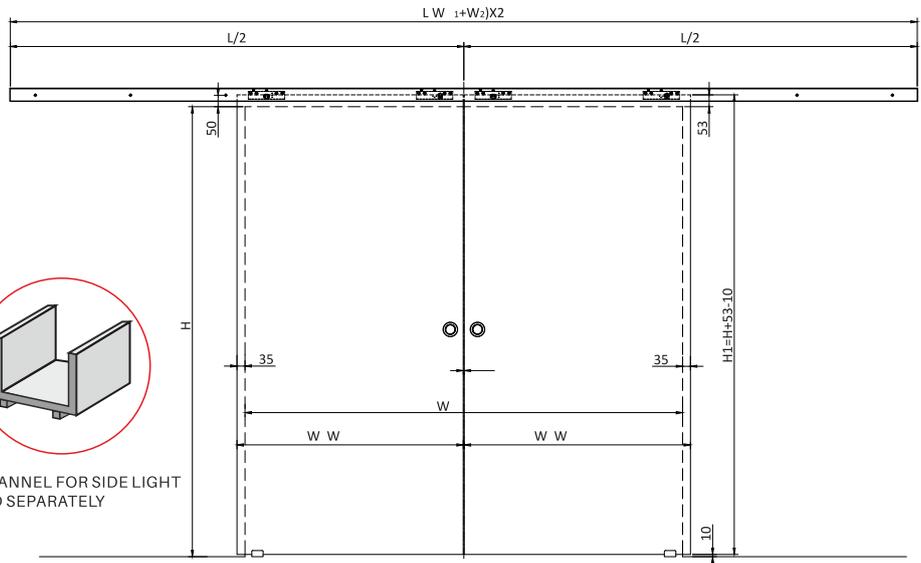

- Sliding door hardware for AUSTIN Single glass door
- Track length: 162"
- Ready-to-install kit including sliding track and parts for wall mounting.
- The track is also pre-drilled for a ceiling mounting.
- Easy to install and long lasting.
- Fluid motion through smooth and silent ball bearing rollers. Smart clamp system avoids drilling glass. Perfect for glass pocket door too.

Available Finishes



Parts list

AUSTIN SOFT CLOSE

TELESCOPIC SOFT CLOSE SLIDERS

26069



TELESCOPIC SLIDING DOOR SYSTEM

For Frame Glass Door and Wooden Door, Max Door Weight 100kg with Aluminium Track, Mounted On Wall, with Soft Close Function

TELESCOPIC SOFT CLOSE


OPTIONS :

- Double Panel System
- Triple Panel System
- Single Sliding
- Bi-parting

APPLICATIONS

- Hospitality
- Retail
- Healthcare
- Transportation
- Store Entrance
- Limited Space
- Room Divider


Available Finishes




	ITEM NO.	L2	L3
1	26069B-01	2pcs	3pcs
2	26069A-09	4pcs	6pcs
3	26069B-05A	2(4)pcs	4(6)pcs
4	26069-05A/100	(2)pcs	(2)pcs
5	26069A-05	2pcs	2pcs
6	26069A-06	1pcs	1pcs
7	26069B-L-01	1pcs	2pcs
8	26069B-L-02	1pcs	2pcs
9	26069B-L-02-001	1pcs	1pcs
10	26069B-L-05	1pcs	1pcs
11	26069B-L-04	1pcs	3pcs
12	26069B-L-06	1pcs	2pcs
13	26069B-L-08	1pc	1pc

MANCHESTER COLLECTION

28088

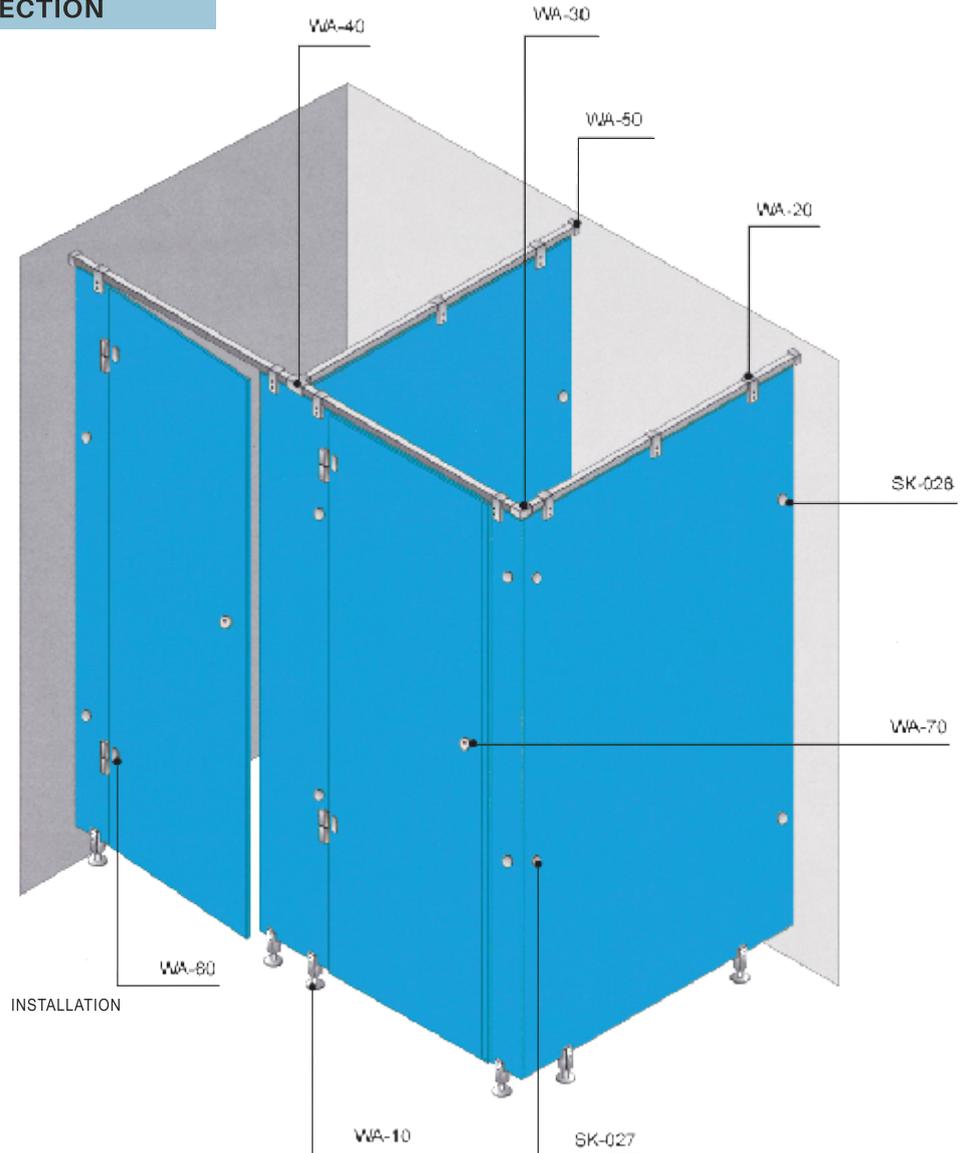


WA-10

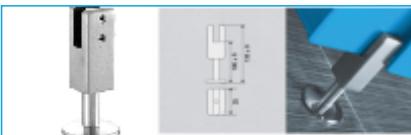

WA-20




WA-30

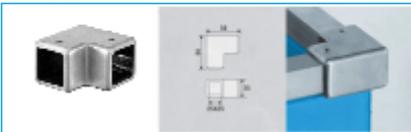

WA-40



WA-50

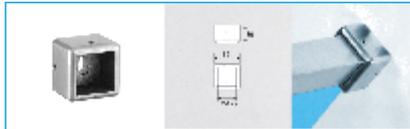

WA-60



WA-70



SK-027



SK-028



SK-029



Available Finishes




BN


DOOR STOPPERS




35118
WALL MOUNT




35117
WALL MOUNT





35151
FLOOR MOUNT




35112
WALL MOUNT




35154
FLOOR MOUNT




35111
FLOOR MOUNT



35120
FLOOR MOUNT




35137
FLOOR MOUNT



Available Finishes




BN MB




ALUMINUM U PROFILE CHANNELS

CODE	HEIGHT	WIDTH	LENGTH	THICKNESS	FINISH
15014SA-12	1.0"	1.0"	12'	1/8"	SATIN ANODIZED
15015SA-12	1.5"	1.0"	12'	1/8"	SATIN ANODIZED
15016SA-12	2.0"	1.0"	12'	1/8"	SATIN ANODIZED




ALUMINUM U PROFILE CHANNELS

CODE	HEIGHT	WIDTH	LENGTH	THICKNESS	FINISH
15014MB-12	1.0"	1.0"	12'	1/8"	MATT BLACK
15015MB-12	1.5"	1.0"	12'	1/8"	MATT BLACK
15016MB-12	2.0"	1.0"	12'	1/8"	MATT BLACK
15014MB-16	1.0"	1.0"	16'	1/8"	MATT BLACK
15015MB-16	1.5"	1.0"	16'	1/8"	MATT BLACK
15016MB-16	2.0"	1.0"	16'	1/8"	MATT BLACK



ALUMINUM U PROFILE CHANNELS

CODE	HEIGHT	WIDTH	LENGTH	THICKNESS	FINISH
15014BN-12	1.0"	1.0"	12'	1/8"	BRUSHED NICKLE
15015BN-12	1.5"	1.0"	12'	1/8"	BRUSHED NICKLE
15016BN-12	2.0"	1.0"	12'	1/8"	BRUSHED NICKLE
15014BN-16	1.0"	1.0"	16'	1/8"	BRUSHED NICKLE
15015BN-16	1.5"	1.0"	16'	1/8"	BRUSHED NICKLE
15016BN-16	2.0"	1.0"	16'	1/8"	BRUSHED NICKLE

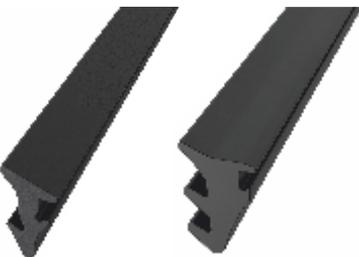

ALUMINUM U PROFILE GASKETS

CODE	DETAILS
15017	Gasket for 12mm Glass
15018	Gasket for 10mm Glass

70 DUROMETER EXTRUDED EPDM


80013

GASKET SETTING TOOL



ALUMINUM U PROFILE END CAPS

CODE	HEIGHT	WIDTH	THICKNESS	FINISH
15055	1.0"	1.0"	1/8"	BN/MB/SA
15056	1.5"	1.0"	1/8"	BN/MB/SA
15057	2.0"	1.0"	1/8"	BN/MB/SA



Available Finishes

